


WHIPFLEX™
STYLE - YWX

0.9 m Low-Profile | End-Fed VHF Antenna

Shakespeare® YWX antenna combines a compact, low-profile design with dependable VHF communication performance. At 0.95 m in length, its lightweight, low-windage construction provides a practical solution for a wide range of marine applications.

YWX antenna features a parallel stainless-steel whip and an O-ring sealed base designed for dependable protection in the marine environment. The V-Tronix solderless connector system allows the 20 m RG58 cable to be easily disconnected and removed when required.

Supplied with a loose PL-259 connector and a 180 mm nylon stand-off bracket, this antenna provides a convenient ready-to-install solution for marine VHF applications.

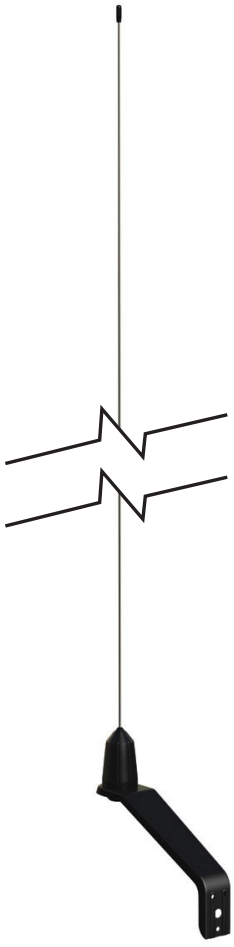

SHAKESPEARE®



Low-Profile | End-Fed VHF Antenna

APPLICATIONS:

- Sailboats
- Rigid Inflatable Boats

FEATURES/BENEFITS:

- Reliable VHF communication - features 3 dB gain and 7 MHz bandwidth for dependable marine communications
- Compact, lightweight, low-windage design
- PL-259 lose connector, 180 mm nylon stand-off bracket, and 20 m RG58 removable cable included for convenient installation
- Omnidirectional radiation pattern provides 360° coverage
- Vertical polarization, and 50-ohm impedance for compatibility with standard VHF system
- 50 W power rating for dependable operation

SPECIFICATIONS:

Model Number	Description	Height	Frequency (MHz)	Gain (dB)	Included Mount
YWX	VHF 3DB 0.9M S/S V-TRONIX WHIPFLEX Whip Antenna, 20M RG58, PL259 Connector, Masthead Nylon Bracket, 156-162 MHz	.9 m	156-162MHz VSWR <1.5:1 (at resonant point)	3	180mm Stand-off Nylon Bracket

LEARN MORE: SCAN QR

Registered in England No. 02452908
VAT No. GB 531 6758 38
+44 (0) 1253 858787

SHAKESPEARE®
shakespeare-marine.com