

IMPORTANT! Please read all instructions before installing.

Thank you for purchasing a Shakespeare antenna product. Shakespeare works hard to build reliability and durability into all of its products for maximum customer satisfaction.

The Classic 5102 is a professional quality, collinear phased $\frac{5}{8}$ -wave VHF marine antenna of 8' overall length with a chrome-plated ferrule.

TOOLS REQUIRED:

- Soldering iron (40-watt min., 75 watt max.)
- Resin core solder
- Pocket knife
- Wire cutter

INSTALLATION INSTRUCTIONS

Choose a mounting location that is as free as possible from obstructions.

Mount the antenna using a Shakespeare 4187 or 5187 mount.

Follow the directions included with the mount you choose.

Route the cable to your radio and install the connector (supplied).

CLEANING INSTRUCTIONS


To clean the antenna, use mild dishwashing liquid (one that is not harsh to the hands and *without* ammonia) in lukewarm water.

WARNING: Do not let paint solvents, cleaning solvents or adhesive caulking come in contact with the antenna. Chemicals in these materials might destroy the finish.

SUPPLIED PARTS:

- 1 Antenna assembly
- 1 PL-259 connector with instruction sheet

TECH TIP: This antenna will read "open circuit" when tested with an ohm meter or continuity tester. The 50-ohm coaxial cable attached can be shortened as required. However, it should remain at least 3 feet (0.9 m) in length, measured from the point where the cable exits the antenna.

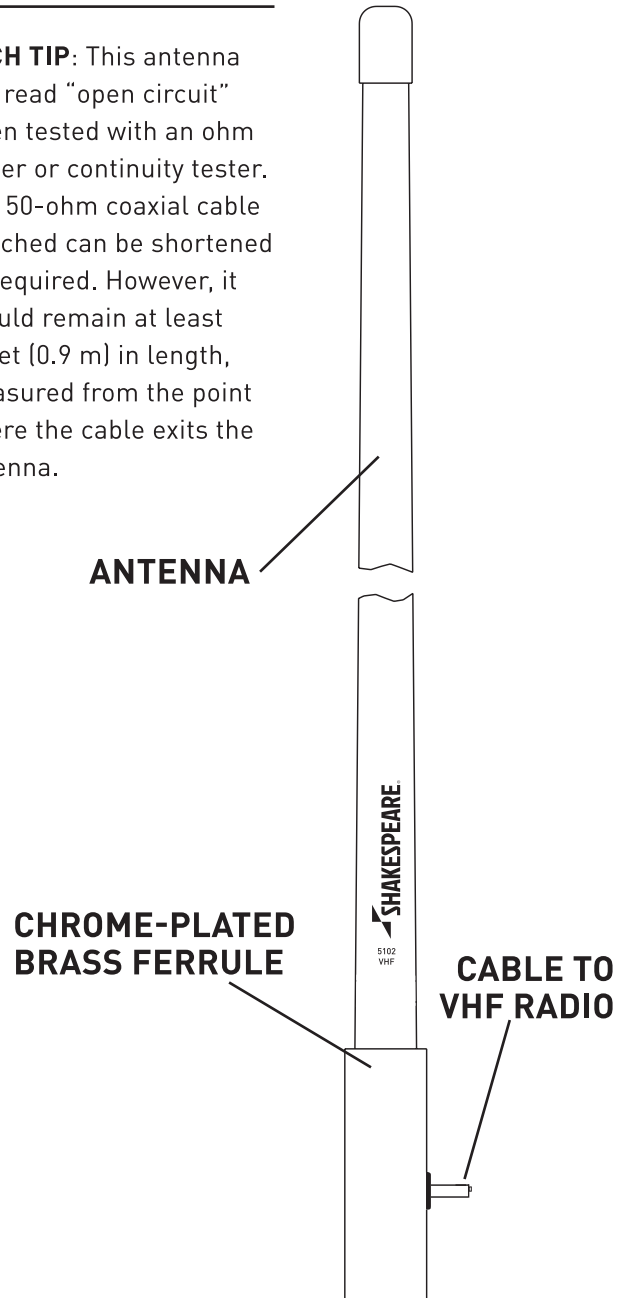

SHAKESPEARE® MARINE
www.shakespeare-marine.com

U.S. Operations: 6111 Shakespeare Rd. · Columbia, SC 29223 · 803-227-1590 · 800-845-7750

U.K. Operations: Enterprise Way, Fleetwood, Lancashire, FY7 8RY, England · +44 (0) 1253 858787 · Fax: +44 (0) 1253-859595